


DECLARATION OF PERFORMANCE

DoP Nr. 964 rev. 3

Type:

HELUZ AKU 25 grinded clay block for concrete infill

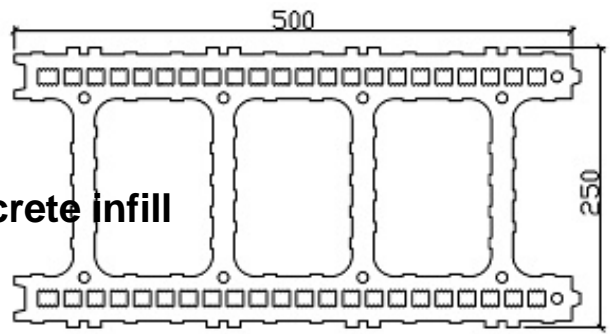

The drawing is indicative and may be modified slightly

1. Unique identification code of the product-type: **21255.05**
2. Intended use:
for protected load-bearing and non-load-bearing sound proof walls

3. Manufacturer:

HELUZ cihlá ský pr mysl v.o.s. U Cihelny 295, CZ 373 65 Dolní Bukovsko I : 46680004
Factory: **Hevlín**

5. System of assessment and verification of constancy of performance of the construction product: **System 2+**

6a. Harmonised standard: EN 771-1:2011+A1:2015; Notified body/ies: 1020 TZÚS Praha, s.p.

7. Declared performance:

Essential characteristic		Performance		Harmonized technical specification
Compressive strength (bedface)*, Category I, P	mean normalized	8	N/mm ²	EN 771-1:2011+A1:2015
		9,2		
Dimensional stability	moisture movement	NPD	mm/m	
Active soluble salts content		NPD (S0)		
Reaction to fire		Euroclass A1		
Water absorption	Not to be left exposed!			
Direct airborne sound insulation	wall with the both side plaster	57 (-2;-5)	dB	
Gross dry density	category of tolerance D2	510	kg/m ³	
Work dimensions Length: Width: Height:	dimensional tolerance and range category Tm R2+	497	mm	
		250	mm	
		249	mm	
Flatness of bed faces		- 0,1	mm	
Plane parallelism of bed faces		0,4	mm	
Group of masonry units	vertically perforated element with a tongue and groove system, group 3 in accordance with EN 1996-1-1, see attached picture			
Bond strength (for elements intended for use in load-bearing structures)	determined value	0,3	N/mm ²	EN 998-2:2016
Water vapor permeability	Diffusion resistance factor	15/20		EN 1745:2012

Essential characteristic		Performance		Harmonized technical specification
Thermal conductivity <small>10,dry , unit</small>	Method	0,562	W/mK	EN 1745:2012
Durability against freeze-thaw	Not to be left exposed!	NPD (F0)		EN 771-1:2011+A1:2015
Hazardous substances	Mass activity ²²⁶ Ra < 120 Bq.kg ⁻¹			

* Test according to EN 772-1, treating compressed areas according to article 7.2.4 and conditioning according to article 7.3.2. A single strength value is not less than 0.8 times of the declared compressive strength.
 ** T_m: At the calibrated bricks is the maximum height difference +/- 0.5 mm. The dimensional tolerance category of width and length is T2 +.

Next characteristics Acoustic brick

The minimum thickness of the face side shells is 12,6 mm and of the perpend shell is 13,4 mm	Minimum area for concrete infill canal is 16894 mm² and its smallest dimension is 105 mm
The minimum thickness of the webs is 4,6 mm	The average volume of the recess (mortar pockets) is - ml
Percentage of voids is 66 %	Percentage of grip hole is - %

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above. Signed for and on behalf of the manufacturer by:



Ing. Jan Smola
Proxy holder